

M-24V60-TRX

PROTRXion™ Series | Data Sheet

inVENTUS[™]
POWER



Automotive grade cells
from top tier manufacturers



Fast charging
within 2 hours



Long shelf life performance
with shutdown mode



Cold temperature functionality
(-35°C) with optional integrated
heater



**BMS certified to functional safety
standard UL/IEC 60730-1**



- **Supports regenerative braking**
- **Soft start control**
(System pre-charge)
- **Patented virtual BMS**
with Advanced Module
Balancing Technology
- **Universal Communication
Protocol** (CANopen/J1939)
- **UL2271 Shock &
Vibration + Thermal
Propagation Mitigation**
- **Compatible with many
off-the-shelf chargers**


Electrical Specifications

Cell Chemistry	LiFePO4
Pack Voltage (Nom/Max)	25.6V / 28.0V
Pack Energy	1.51kWh (59Ah)
Specific Energy	90Wh/kg
Continuous Power	1.9kW (75A)
Recommended Charge CCCV	30A / 28.0V
Peak Power (<10sec)	6.14kW (240A)
Cycle Life (@ 25°C)	3,000 @ 80% DoD
Scalability	Up to 10 packs in parallel

Operational Specifications

Charge Temp	0°C to 55°C -35°C to 55°C (w/ heater)
Discharge Temp	-20°C to 60°C -35°C to 60°C (w/ heater)
Storage Temp	-20°C to 60°C
Humidity (Operating)	5% to 95%
Humidity (Storage)	<70%

Mechanical Specifications

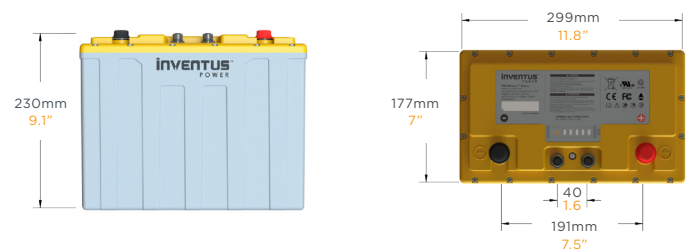

BCI Size	Group 27
Terminal Type (ISO)	M8
Terminal Torque (Nm)	17 ± 1
Weight	16.7kg (36.8lbs)
Installation Orientation	Horizontal / Vertical
Ingress Protection Rating	IP67*
Case Flammability Rating	Flame Retardant UL94 V-0

Certifications

- UL1642 (Cell)
- UL2271 (Pack)
- IEC62133 (Cell/Pack)
- IEC62619
- FCC Class B
- CE
- UN38.3

*IP65 if communication ports left unmatd

Market Applications



Professional
Cleaning



Light Electric
Vehicle



Aerial Work Platform



Material Handling




Robotics



Renewables &
Energy Storage


Capacity vs. Discharge Rate

Test condition: Ambient Temperature

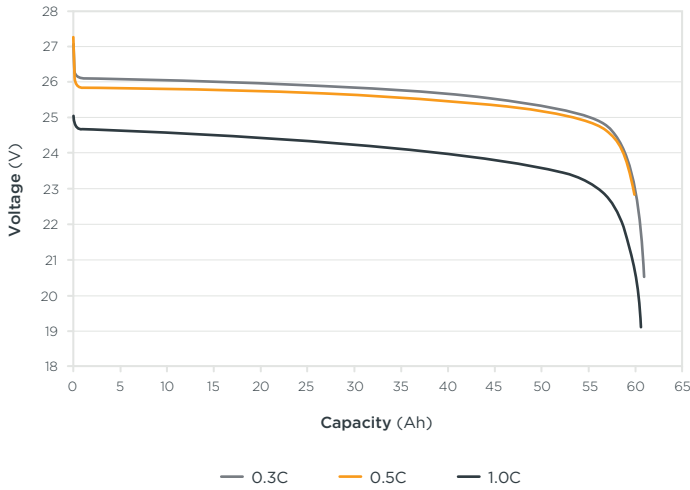


Cycle Life @ 80% DoD

Charge 0.5C, discharge 1C at 25°C

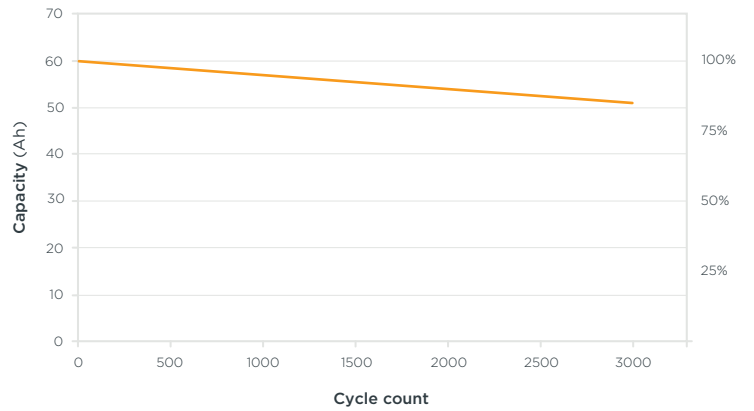


Voltage and Capacity vs. Temperature

Discharge current: 1.0C

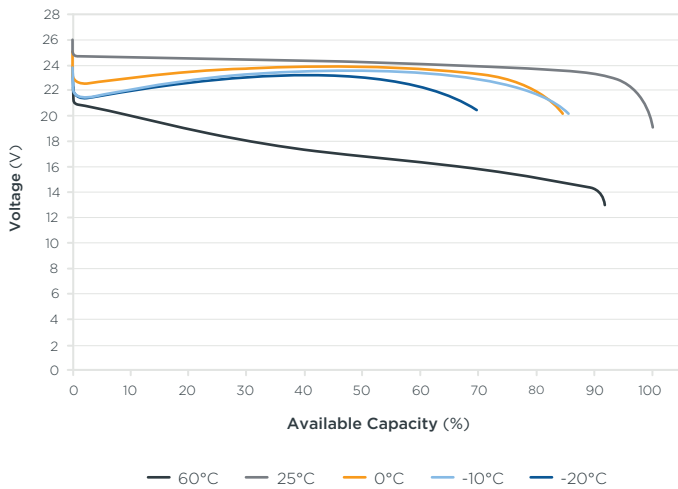

Charging Performance

Test condition: Ambient Temperature

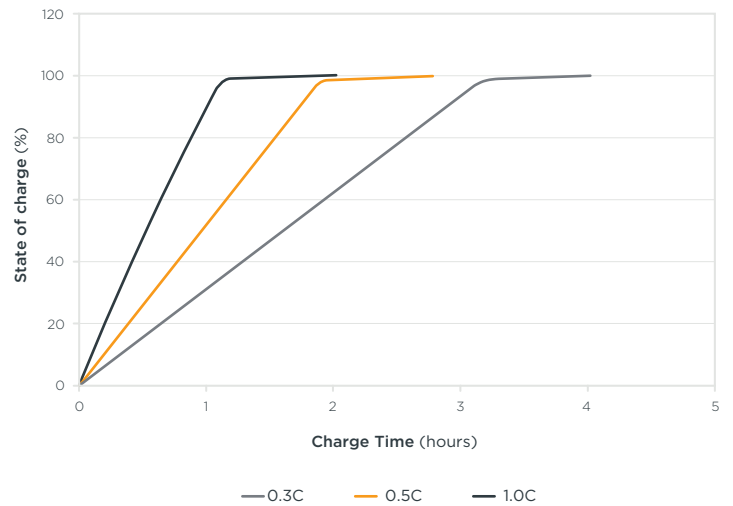

Inventus Power reserves the right to make adjustments to this document at any time, without notice or obligation. All data in this publication is for reference use only. Models may vary from shown.



Request more Information

inventuspower.com | info@inventuspower.com | +1 877.423.4242