

S-24V90-TRX

PROTRXion™ Series | Technical Data Sheet

inVENTUS[™]
POWER



Automotive grade cells
from top tier manufacturers



Fast charging
within 2 hours



Long shelf life performance
with shutdown mode



Scalable to increase runtime



- **Plug & play lead acid replacement** (terminals always on)
- **Surge protection** for regenerative braking
- **Patented virtual BMS** with Advanced Module Balancing Technology
- **UL2271 Shock & Vibration + Thermal Propagation Mitigation**
- **Compatible with many off-the-shelf chargers**


Electrical Specifications

Cell Chemistry	LiFePO4
Pack Voltage (Nom/Max)	25.6V / 28.0V
Pack Energy	2.3kWh (90Ah)
Specific Energy	113Wh/kg
Continuous Power	3.8kW (150A)
Recommended Charge CCCV	45A / 28.0V
Peak Power (<10sec)	5.12kW (200A)
Cycle Life (@ 25°C)	4,000 @ 80% DoD
Scalability	Up to 6 packs in parallel

Operational Specifications

Charge Temp	0°C to 55°C
Discharge Temp	-20°C to 55°C
Storage Temp	-20°C to 60°C
Humidity (Operating)	5% to 95%
Humidity (Storage)	<70%

Mechanical Specifications

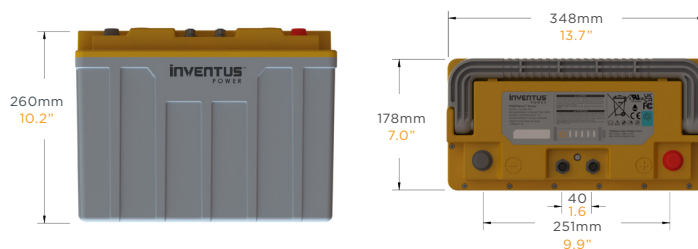

BCI Size	Group 5D
Terminal Type (ISO)	M8 (Neg), M10 (Pos)
Terminal Torque (Nm)	17 ± 1 (Neg), 22 ± 1 (Pos)
Weight	20.4kg (45.0lbs)
Installation Orientation	Horizontal / Vertical
Ingress Protection Rating	IP67*
Case Flammability Rating	Flame Retardant UL94 V-0

Certifications

- UL1642 (Cell)
- UL2271 (Pack)
- IEC62133 (Cell/Pack)
- IEC62619
- FCC Class B
- CE
- UN38.3

*IP65 if communication ports are left unmated

Market Applications



Professional
Cleaning



Light Electric
Vehicle



Aerial Work Platform



Material Handling



Robotics




Renewables &
Energy Storage

S-24V90-TRX

PROTRXion™ Series | Technical Data Sheet


Capacity vs. Discharge Rate

Test condition: Ambient Temperature

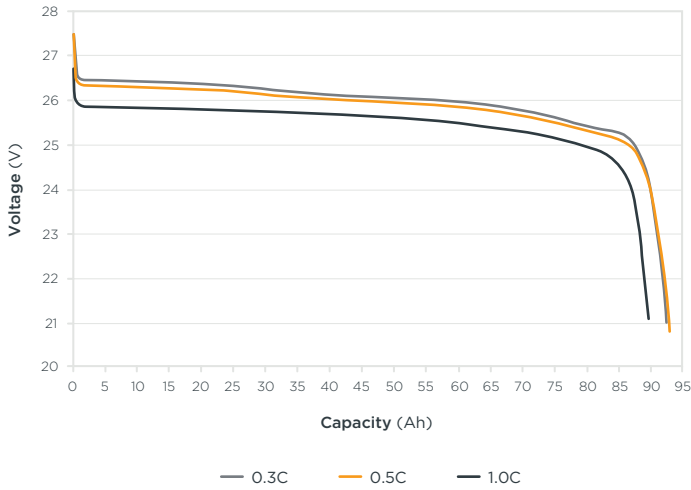


Cycle Life @ 80% DoD

Charge 0.5C, discharge 1C at 25°C

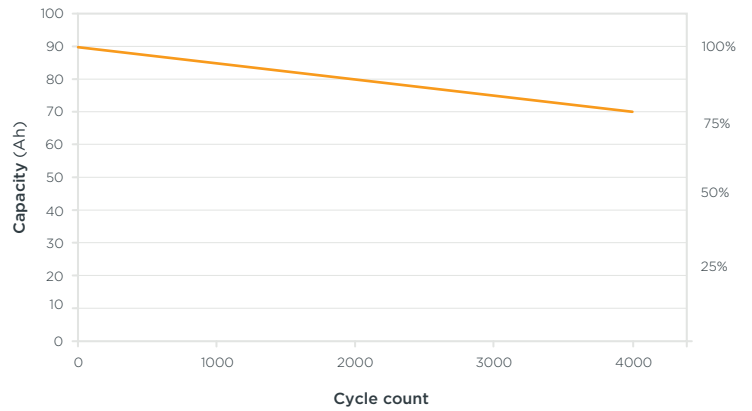


Voltage and Capacity vs. Temperature

Discharge current: 1.0C

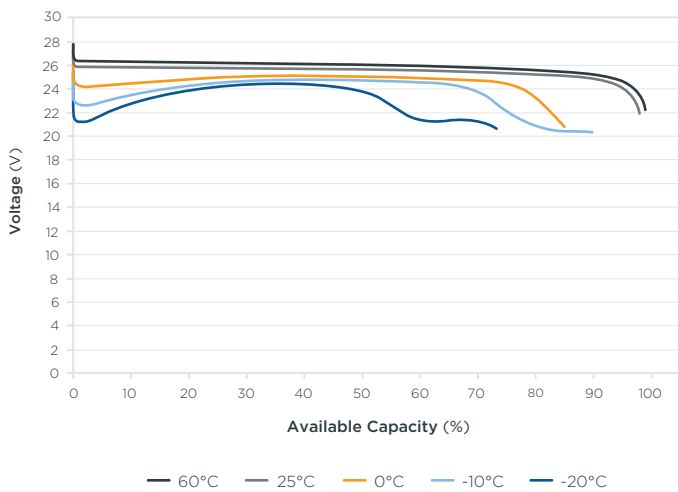

Charging Performance

Test condition: Ambient Temperature

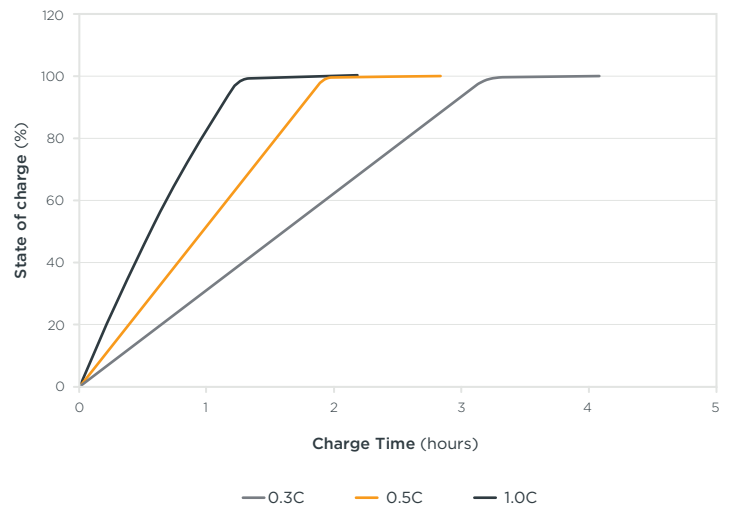

Inventus Power reserves the right to make adjustments to this document at any time, without notice or obligation. All data in this publication is for reference use only. Models may vary from shown.



Request
more Information

inventuspower.com | info@inventuspower.com | +1 877.423.4242